



SOLID
TO SUCCEED

SCISSOR LIFT

XG0807AEW



HYDRAULIC OIL FREE



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XG0807AEW

Scissor lift


FEATURES

PRODUCTIVITY

2 front driving wheels
 25% theoretical gradeability
 Battery charge indicator and diagnostic display
 Manual platform lowering valve
 Both platform and ground control panel with emergency stop button
 Front wheel multi-disc brakes
 Manual brake release
 Solid non-marking tires
 Mobile pothole protection
 Tilt alarm
 Hourmeter record
 Lift and lower alarm
 Horn
 Dual flashing beacons
 Drive alarm
 Overload alarm

OPTIONS

Platform working light
 Air-line to platform
 AC power to the platform

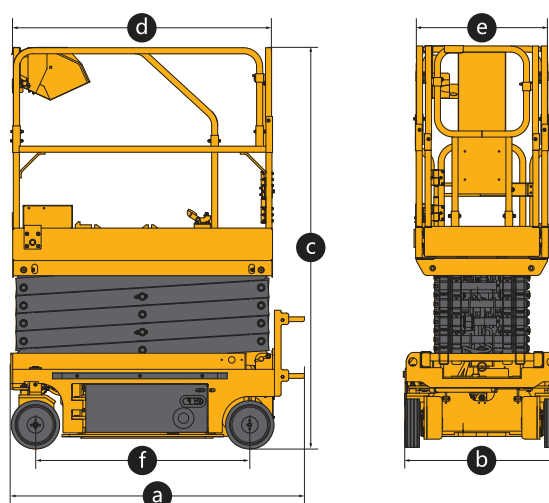

Item	Unit	XG0807AEW
Lift capacity	kg	280
Lift capacity of auxiliary platform	kg	115
Occupant capacity	-	2
Working height	m	7.8
Platform height	m	5.8
Length of auxiliary platform	mm	900
Ground clearance (pothole protector – raised/lowered)	mm	65/20
Turning radius (inside/outside)	m	0.02/1.75
Drive motor	kW	0.5
Lift motor	kW	1.4
Drive speed (retracted/extended)	km/h	4.0/0.8
Lift/Lower time	s	13~30/30~45
Gradeability	%	25
Tilt alarm (side/forward and backward)	°	1.5/3.5
Batteries	V/Ah	2×12/75
Charger	V/A	24/30
Tires	-	323×100
Weight	kg	1600
a Length (without ladder)	mm	1900(1680)
b Width	mm	810
c Height (platform folded)	mm	2160(1830)
d x e Platform size (Length x Width)	mm	1670×740
f Wheelbase	mm	1360

SOLID TO SUCCEED